LumiSource, Inc.

Swift Office Chair

Assembly Instructions
Instrucciones De Asamblea
Instructions d'Assemblée

Part # CHR-TW-SWIFT XX

December 2010

Instructions

1. Remove protective cap from Hydraulic Pole (G).
2. Place Castor Wheels (J) on Base (I) using Standard Wrench (L).
3. Insert Hydraulic Pole (G) into Base (I) followed by Decorative Ring (H) and Lift Cover (F).
4. Place Backrest (A) on Seat (C) using Flat Head Screws (B) with Allen Wrench (K).
5. Secure Hydraulic Lever (D) to Seat (C) using Hex Screws (E) with Allen Wrench (K).
6. Place assembled seat (Steps 4-5) on assembled base (Steps 1-3).
7. Carefully sit on Seat (C) to secure.
8. Adjust height using Hydraulic Lever (D).

Part List

1 Backrest (A)
1 Seat (C)
1 Hydraulic Lever (D)
1 Lift Cover (F)
1 Hydraulic Pole (G)
1 Decorative Ring (H)
1 Base (I)
5 Castor Wheels (J)
2 Flat Head Screws (B)
4 Hex Screws (E)
1 Allen Wrench (K)
1 Standard Wrench (L)



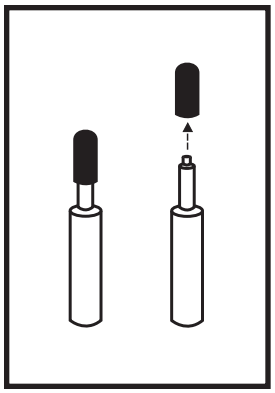

ATTENTION:

This cap must be removed prior to assembly!